

CRANE « R 120 SEL »




Standard

Lifting moment - 12 t/m
Hydraulic outreach - 7,65 m
Jib with hydraulic extension
Ground 3 element flow control
Top seat controls with one additional function
360° single rack rotation
Hydraulic stabilizers with hydraulic outreach
Access ladder
Painting in orange RAL 2002 (or other out of choice)
Construction according to Machinery Directives
98/37/CE, 98/336/CE and DIN 15018
Approx. weight - kg 2.500

Options:

Second additional function for rotator
Hydraulic stabilizers with hydraulic extension
Electro-hydraulic proportional DANFOSS-flow control
with proportional radio control
Seat control with cross levers and pedals
Glass container handling device
Oil cooling system
Various lifting disposals for different kinds of use

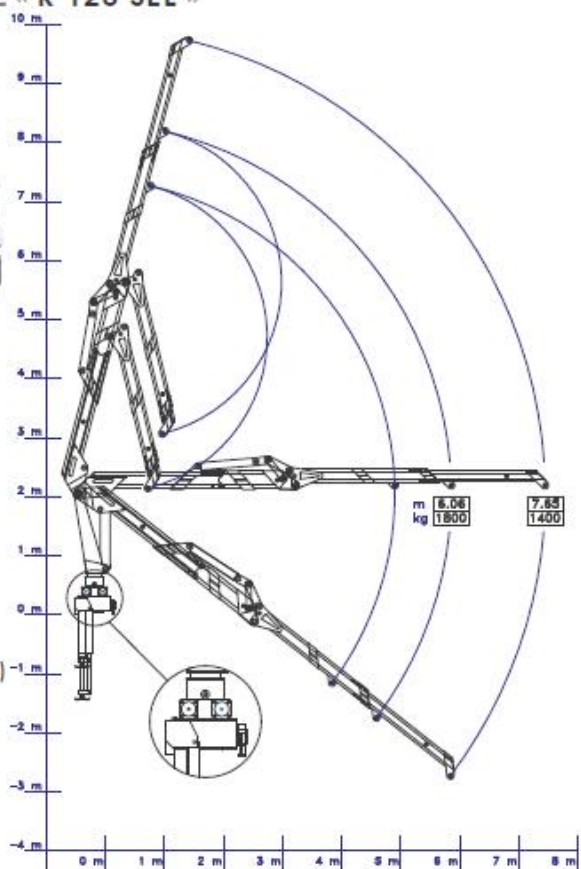

SK

Zdvihový moment: 12 tnm

Hydraulický dosah: 7,65 m

Otočný uhol: 360°

Hmotnosť: cca 2500 kg

Prídavná funkcia pre rotátor

System pre ochladzovanie oleja

Variabilné zdvižné dispozície pre rôzne druhy použitia